


Search for heavy metastable particles decaying to jet pairs in $p\bar{p}$ collisions at $\sqrt{s}=1.96$ TeV

Paper Seminar


Shawn Kwang
Mel Shochet

University of Chicago
CDF Notes: **10315** (internal), **10356**
(public), **10503** (1st draft), **10602** (2nd
draft)




Hidden Valley

- ▶ Energy from collisions enter into the new sector.
- ▶ It is transformed into multiple particles through the dynamics of the new sector.
 - ▶ These valley-particles (or v -particles) behave in the same way as SM particles.
 - ▶ They obey a “ v -QCD,”
 - ▶ Most likely decay is a v - π .
- ▶ Some of these particles decay back into SM particles.
- ▶ This model can co-exist with other models as well.
 - ▶ SUSY, technicolor, etc.
- ▶ It may help in the search for the Higgs.
 - ▶ The Higgs may decays into long-lived neutral v -particles, which are heavy and meta-stable. They would decay at a displaced vertex.
 - ▶ These would then decay into the heaviest SM fermion available (b-quarks).
- ▶ Because this sector is dark, there may be Dark Matter/Astrophysics connections as well.
- ▶ In some models (see Kaplan, Luty, Zurek) $c\tau$ for the heavy metastable particle could be of order 1 cm.


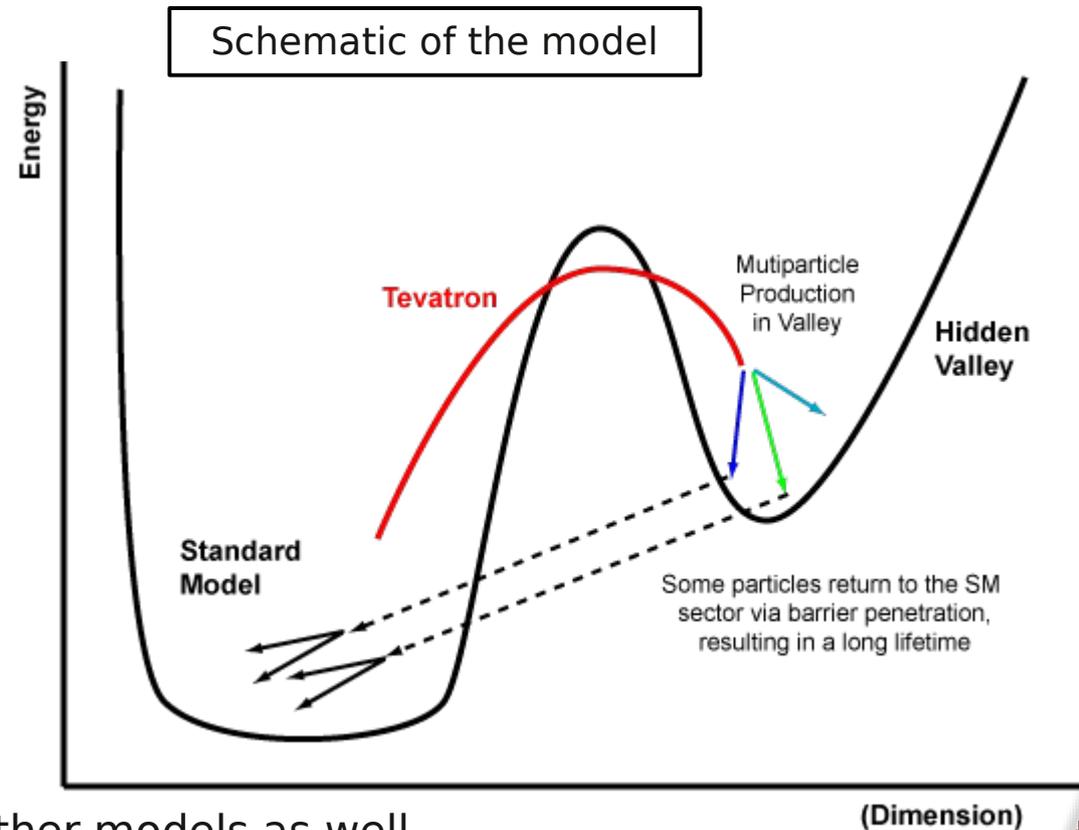


2011-09-DD




Title here


- ▶ Right: Feynman diagram of HV production
- ▶ Below: Outline of the analysis

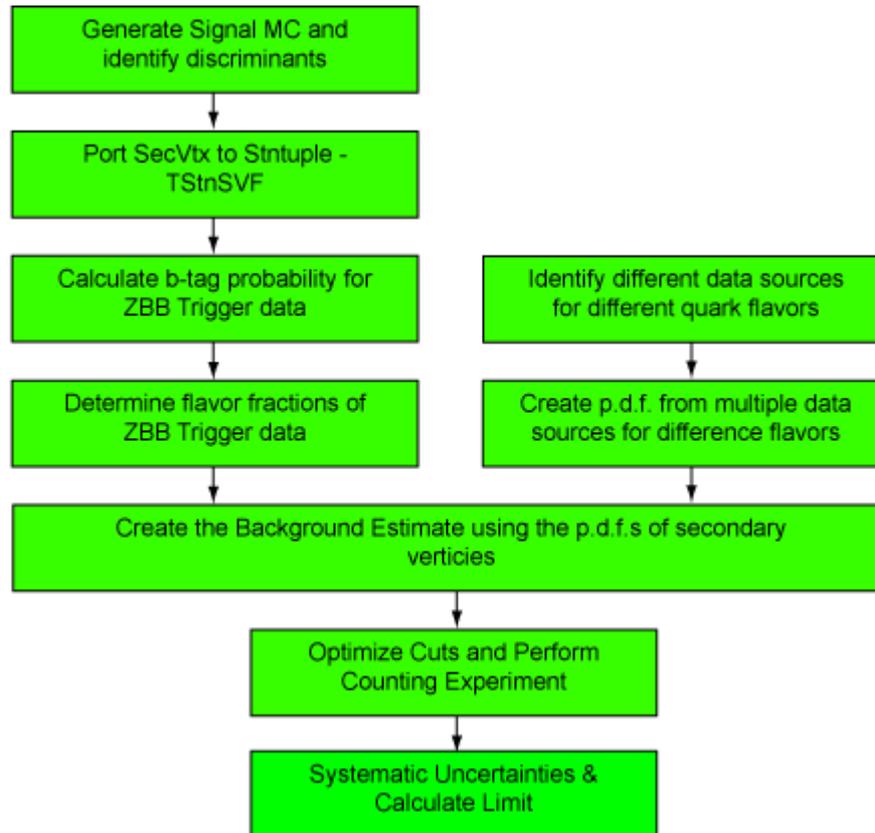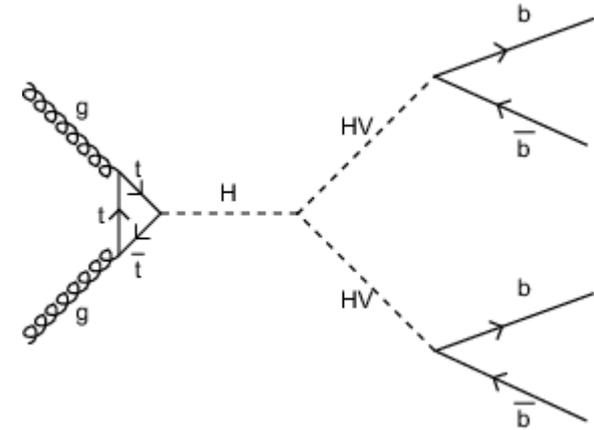

2011-09-DD




Model Diagram

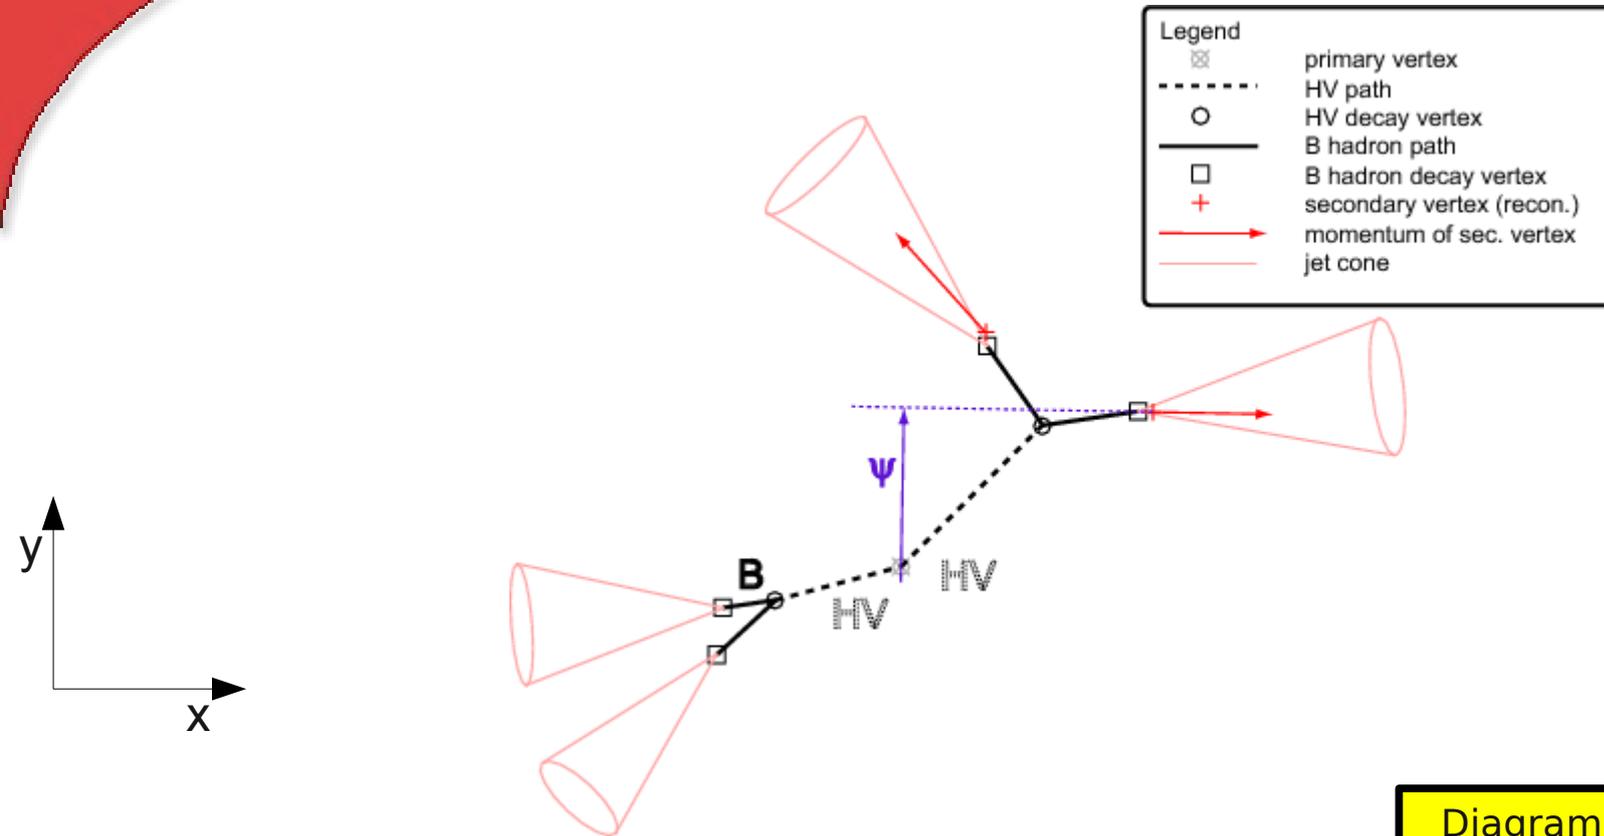

ψ is the impact parameter of a jet with a secondary vertex.

This is in two-dimensional space.

2011-09-DD



Model Diagram



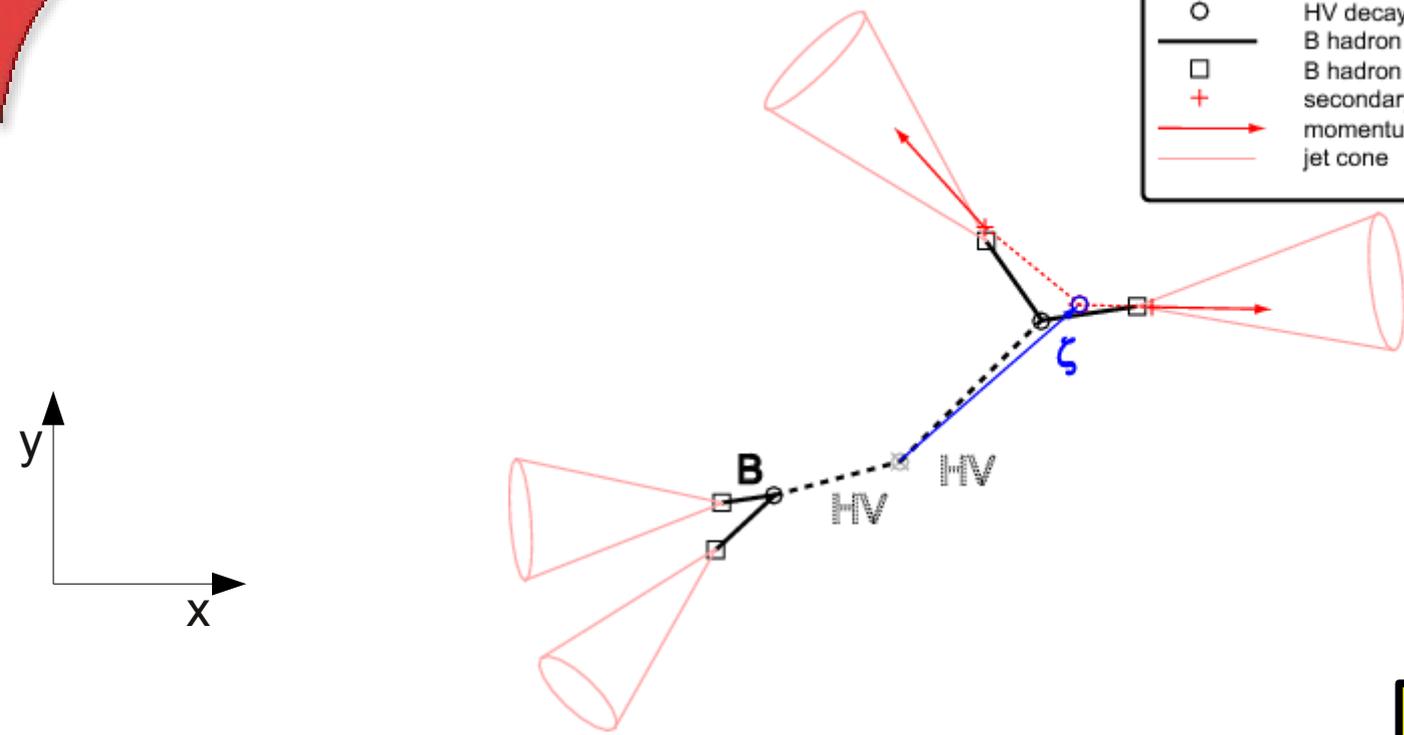


Diagram not to Scale

ζ is the reconstructed decay distance of the HV particle. It requires two tagged jets.
This is in two-dimensional space.

2011-09-DD

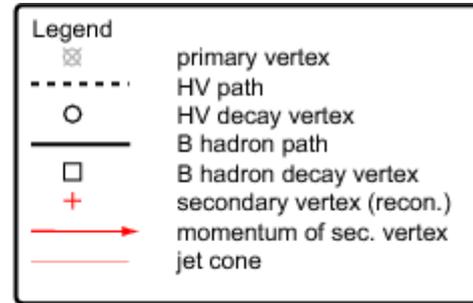

Model Diagram

Legend	
	Primary Vertex
	B Hadron path
	B Hadron Decay Vertex
	SecVtx (reconstructed)
	b-tag momentum
	Jet cone


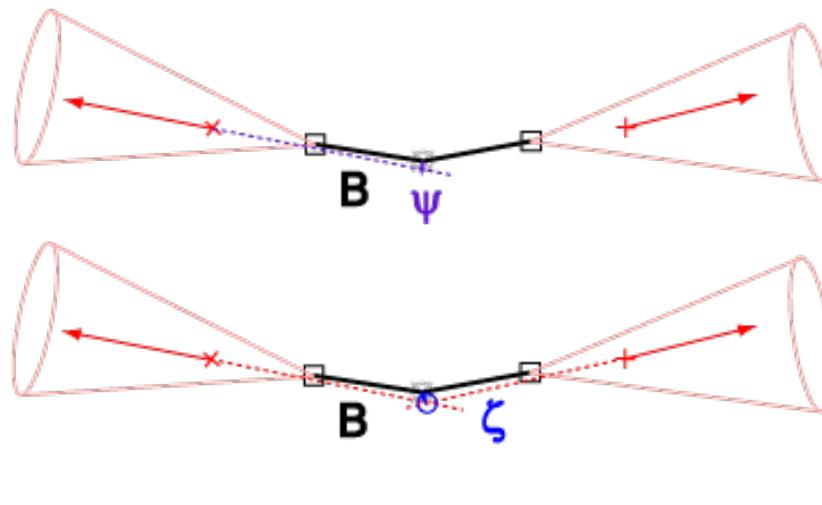





Diagram not to Scale

Here is a typical QCD di-jet event with two b quarks (b & bbar) decaying into two B hadrons. Each has a reconstructed secondary vertex represented by a red cross. Both ψ/ζ are very small for these background events.

2011-09-DD




Signal MC

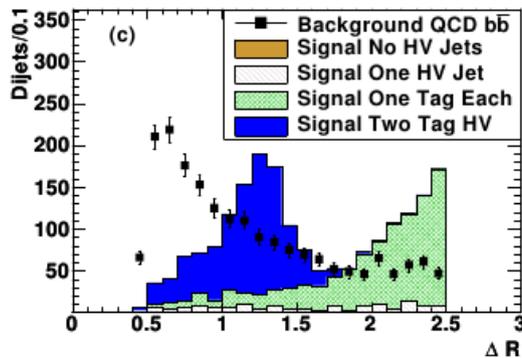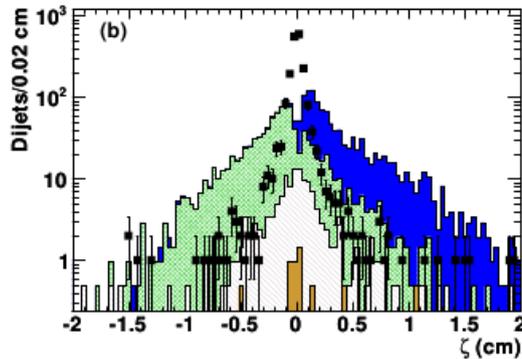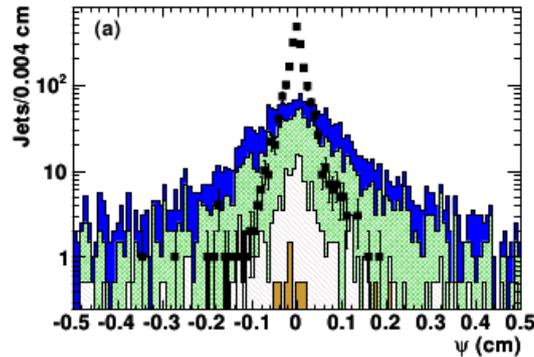

- ▶ Five signal MC samples generated.
 - ▶ h_0 mass : $M_{h_0} = 130, 170$ GeV
 - ▶ HV mass : $M_{HV} = 20, 40, 65$ GeV
 - ▶ HV lifetime : $c\tau = 1$ cm
 - ▶ Reweight lifetimes to study: $c\tau = 0.3, 2.5, \text{ and } 5.0$ cm
- ▶ Compare the signal MC to QCD $b\bar{b}$ background MC
- ▶ ΔR is also a discriminant

2011-09-DD



ZBB Trigger

- ▶ This search is performed using the ZBB Trigger.
- ▶ This trigger selects displaced tracks, e.g., from B hadron decay.
- ▶ Total integrated luminosity is 3.2 fb^{-1} .

TABLE I: ZBB trigger requirements. One of the two level-2 paths, opposite side (OS) or same side (SS) must be satisfied.

Level-1 at least one central calorimeter tower with $E_T > 5 \text{ GeV}$;

at least two tracks: one track with $p_T > 5.48 \text{ GeV}/c$, one with $p_T > 2.46 \text{ GeV}/c$

Level-2 veto events with a calorimeter cluster with $E_T > 5 \text{ GeV}$, $1.1 < |\eta| < 3.6$;

require at least two clusters $E_T > 5 \text{ GeV}$, $|\eta| < 1.1$, which have $135 < \Delta\phi < 180$;

at least two SVT tracks with $p_T > 2 \text{ GeV}/c$, $160 \mu\text{m} < |d_0| < 1000 \mu\text{m}$, $\chi^2 < 12$

(OS) tracks have $150^\circ < \Delta\phi < 180^\circ$

(SS) tracks have $2^\circ < \Delta\phi < 30^\circ$

Level-3 at least two $\Delta R = 0.7$ jets with $E_T > 10 \text{ GeV}$, $|\eta| < 1.1$;

at least two SVT tracks with $p_T > 2 \text{ GeV}/c$, $|\eta| < 1.2$, $160 \mu\text{m} < |d_0| < 1000 \mu\text{m}$;

at least two COT tracks with $p_T > 1.5 \text{ GeV}/c$, $|\eta| < 1.2$, $130 \mu\text{m} < |d_0| < 1000 \mu\text{m}$,

track impact parameter significance $S(d_0) > 3$, $|\Delta z| < 5 \text{ cm}$

2011-09-DD



More Event Selection

- ▶ We will be looking for events with central b-tagged jets, with a relatively low E_T requirement, i.e. “Signal Region”.
 - ▶ All jets are required to have:
 - ▶ $E_T > 20$ GeV, corrected at Level-5
 - ▶ $|\eta| < 1.0$
 - ▶ Jet multiplicity: $N_{\text{jet}} \geq 3$
 - ▶ For the dijet system, require that it be in a region that would be populated by signal.
 - ▶ $\Delta R < 2.5$
- ▶ A “Control Region” is defined which contains events orthogonal to the Signal Region,
 - ▶ Two tight central jets ($N_{\text{jet}} = 2$)
 - ▶ A third jet with Level 5 corrected $E_T < 15$ GeV.
- ▶ A new secondary vertex tagger was written because of limitation of SECVTX.
 - ▶ The algorithm was modified to increase the efficiency of finding long lived particles
 - ▶ The maximum $|d_0|$ cut in the b-tagger is varied to find an optimal cut.

2010-12-03



Background Estimate


- ▶ We produce a data driven background estimate by looking at orthogonal data samples when possible.
 - ▶ Muon calibration data – enriched with b-quarks
 - ▶ JET trigger data – light quarks and gluons (light flavor)
 - ▶ QCD MC simulation – for c-quarks because there is no dedicated charm trigger.
- ▶ Build pdfs of secondary vertices from these data sources which characterize Standard Model secondary vertices.
 - ▶ Definition: pdfs are from data, vertex track mass templates are from MC
- ▶ Generate pseudoevents where the pdfs are applied to jets in ZBB trigger sample
 - ▶ Kinematic information comes from ZBB trigger
 - ▶ Secondary vertex information comes from pdfs, i.e., SM background sources
- ▶ Calculate: b-tagging probability in ZBB sample and flavor composition of ZBB sample
 - ▶ b-tagging probability is the number of events with two b-tags divided by all events; probabilities are calculated in different bins of jet E_T and number of SVT tracks.
 - ▶ Flavor composition is performed by generating templates from QCD MC of different quark flavors and fraction fitting the ZBB trigger data.

2011-09-DD



P.d.f. Diagram

- ▶ We use three p.d.f. variables in the plane transverse to the beam line.
 - ▶ u – the L_{xy} component vector parallel to the jet axis
 - ▶ v – the L_{xy} component vector perpendicular to the jet axis
 - ▶ α – the angle between the secondary vertex momentum and the jet momentum
- ▶ Where L_{xy} is the distance from the primary vertex to the secondary vertex in the transverse plane.

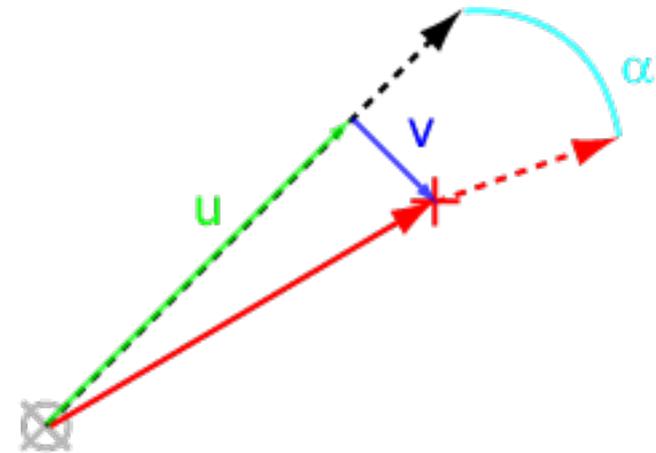

Black Dashed Line

Red Cross

Red Solid Line

Red Dashed Line

Green Line (u)

Blue Line (v)

Cyan Arc (α)

Jet Momentum

Secondary Vertex

Sec Vertex L_{xy}


Sec Vertex Momentum

Parallel component of L_{xy}

Perp. component of L_{xy}

Angle b/w the two momenta

2010-12-03



Analysis Cuts

- ▶ Generate multiple ensembles of pseudoevents; 10,000 “pseudoexperiments.”
- ▶ Each is independent and subject to the same analysis cuts.
- ▶ For each pseudoexperiment, a integer number of events pass analysis cuts; we take the mean number as the background estimate.
- ▶ These cuts optimize S/\sqrt{B} in two searches: high and low HV masses.
 - ▶ Top table shows the analysis cuts on the discriminants.
 - ▶ Bottom table shows additional cuts that were applied to remove some unexpected background where two secondary vertices are found to be coincident.
 - ▶ These originate from decay products from a single b-jet being found in two jet cones. This motivates the mass cut.

Variable	high HV	low HV
	mass	mass
$ d_0 _{max}$ (cm)	< 1.0	< 1.0
ΔR_{min}	> 0.75	<i>n.a.</i>
ΔR_{max}	< 2.0	< 0.75
$ \psi $ (both jets) (cm)	> 0.11	> 0.12
ζ (cm)	> 0.8	> 0.7
$ \zeta $ (cm)	< Minimum($L_{xy 1}, L_{xy 2}$)	

Variable	low HV	mass
ΔS_{2d} (cm)	>	0.06
OR		
Σm_{vtx} (GeV/c ²)	>	5.0

2010-12-03



Search Results

- ▶ Expected Signal MC after all cuts
- ▶ Background estimate for each HV mass search
- ▶ We observe 1 event in the low HV mass search and one different event in the high HV mass search.

Higgs Boson Mass (GeV/c ²)	HV Mass (GeV/c ²)	HV life-time (cm)	Expected Signal MC	Background Estimate	Number Observed
low HV mass search					
130	20	1.0	0.64	0.58	1
170	20	1.0	0.074	0.58	1
high HV mass search					
130	40	1.0	0.26	0.29	1
170	40	1.0	0.38	0.29	1
170	65	1.0	0.14	0.29	1
130	40	0.3	0.24	0.29	1
130	40	2.5	0.10	0.29	1
130	40	5.0	0.043	0.29	1

2011-09-DD



Systematic Uncertainty

▶ Systematic Uncertainties on the data

- ▶ Statistics from pdfs
- ▶ Tagging probability systematic
- ▶ Flavor composition systematic

▶ Systematic Uncertainties on MC

- ▶ Jet Energy Scale (JES)
- ▶ Uncertainty from the trigger
- ▶ Tagging scale factor
- ▶ Parton distribution function
- ▶ Luminosity

Uncertainty	Down (%)	Up (%)
Background estimate - low HV mass search		
Data statistics	±0.039	
Tag prob. statistics	-7.7	3.4
Flavor composition	-0.5	2.75
Background estimate - high HV mass search		
Data statistics	±0.046	
Tag prob. statistics	±3.9	
Flavor composition	-0.5	8.9
Signal MC		
Jet Energy Scale	-15.6% to -6.3%	4.0% to 25.5%
Trigger Unc.	±8.9	
Tagging scale factor	±10	
P.d.f.	±2.5	
Luminosity	±6	

2011-09-DD



P-values and Limits


Higgs Boson Mass (GeV/c ²)	HV Mass (GeV/c ²)	HV life-time (cm)	p-value	Higgs Boson Mass (GeV/c ²)	HV Mass (GeV/c ²)	HV life-time (cm)	Obs. Limit (pb)	Expected Limit (pb)				
								-2 σ	-1 σ	median	+1 σ	+2 σ
low HV mass search				low HV mass search								
130	20	1.0	0.44	130	20	1.0	6.2	4.3	4.3	4.3	6.2	8.4
170	20	1.0	0.43	170	20	1.0	22.1	15.2	15.2	15.2	22.1	29.9
high HV mass search				high HV mass search								
130	40	1.0	0.27	130	40	1.0	15.9	10.5	10.5	10.5	15.9	21.5
170	40	1.0	0.26	170	40	1.0	4.4	2.9	2.9	2.9	4.4	6.0
170	65	1.0	0.26	170	65	1.0	11.7	7.7	7.7	7.7	11.7	15.7
130	40	0.3	0.27	130	40	0.3	17.8	11.7	11.7	11.7	17.8	24.2
130	40	2.5	0.27	130	40	2.5	40.7	26.8	26.8	26.8	40.7	55.1
130	40	5.0	0.27	130	40	5.0	94.3	62.0	62.0	62.0	94.3	127.9

P-values for the null-hypothesis of our search. Limits calculated at 95% confidence level.

-09-DD




Limit Figures

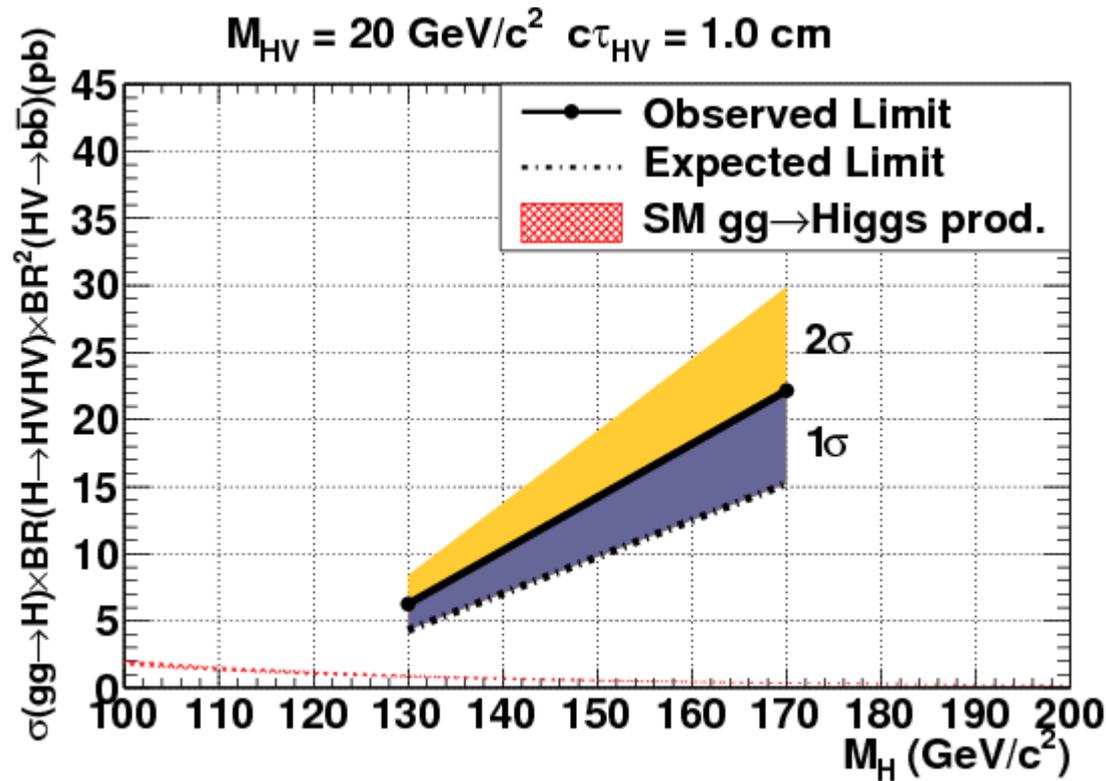


Observed and expected limits at 95% confidence level with 1 and 2 σ bands. The hashed line is SM Higgs boson production.

2011-09-DD




Limit Figures

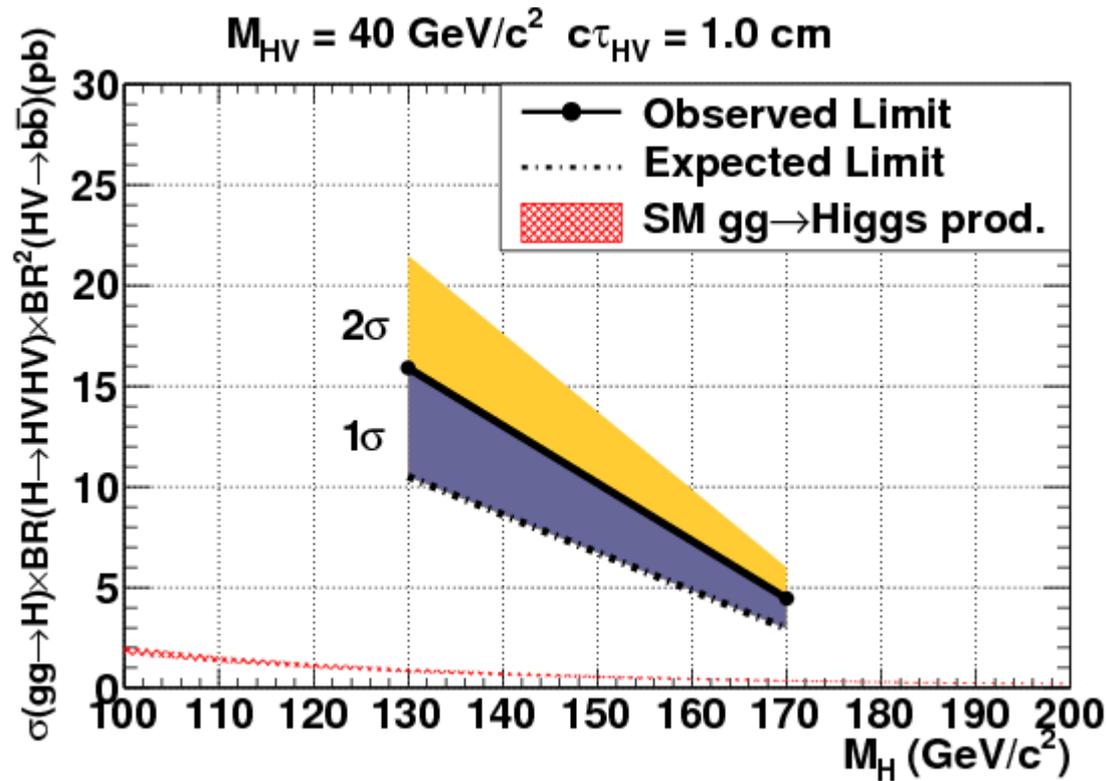


Observed and expected limits at 95% confidence level with 1 and 2 σ bands. The hashed line is SM Higgs boson production.

2011-09-DD




Limit Figures

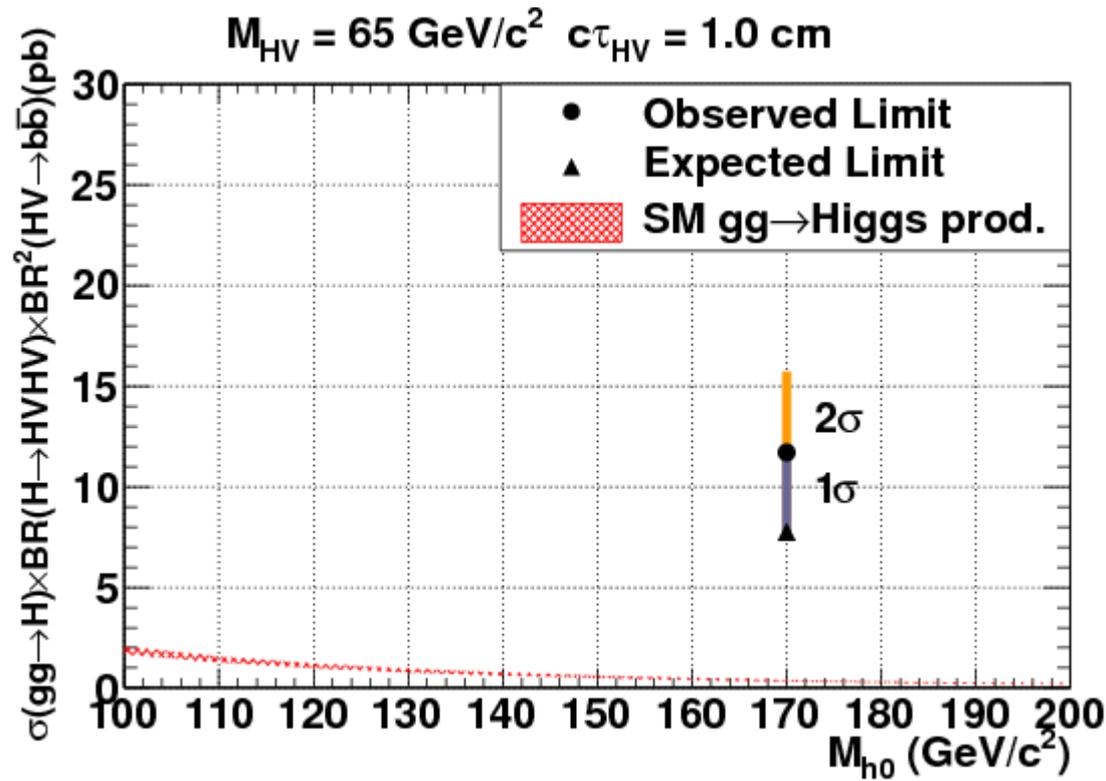


Observed and expected limits at 95% confidence level with 1 and 2 σ bands. The hashed line is SM Higgs boson production.

2011-09-DD




Limit Figures

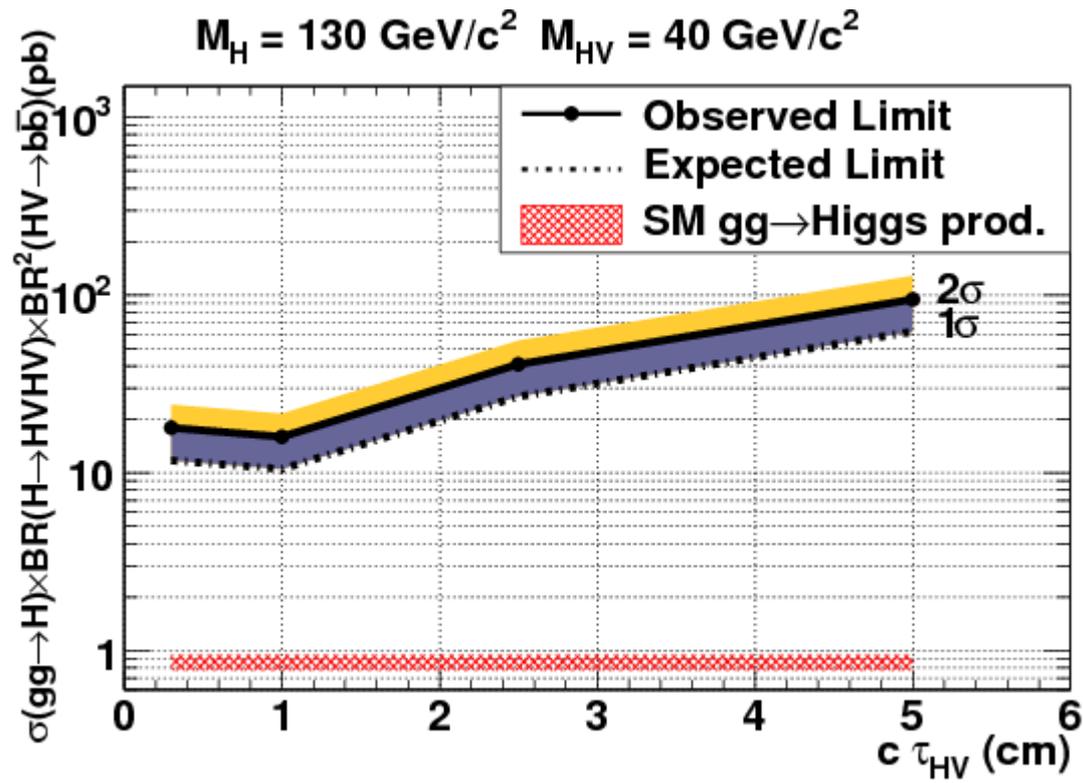

Observed and expected limits at 95% confidence level with 1 and 2 σ bands. The hashed line is SM Higgs boson production.


2011-09-DD



Conclusion


- ▶ No statistically significant excess is observed about the background. Limits are set on HV production.
- ▶ Web site for this analysis:
 - ▶ <http://www-cdf.fnal.gov/internal/physics/godparents/disptx2010/>
 - ▶ http://www-cdf.fnal.gov/physics/new/hdg/Results_files/results/HV_Dec2010/

2011-09-DD



Shawn Kwang

Flowchart

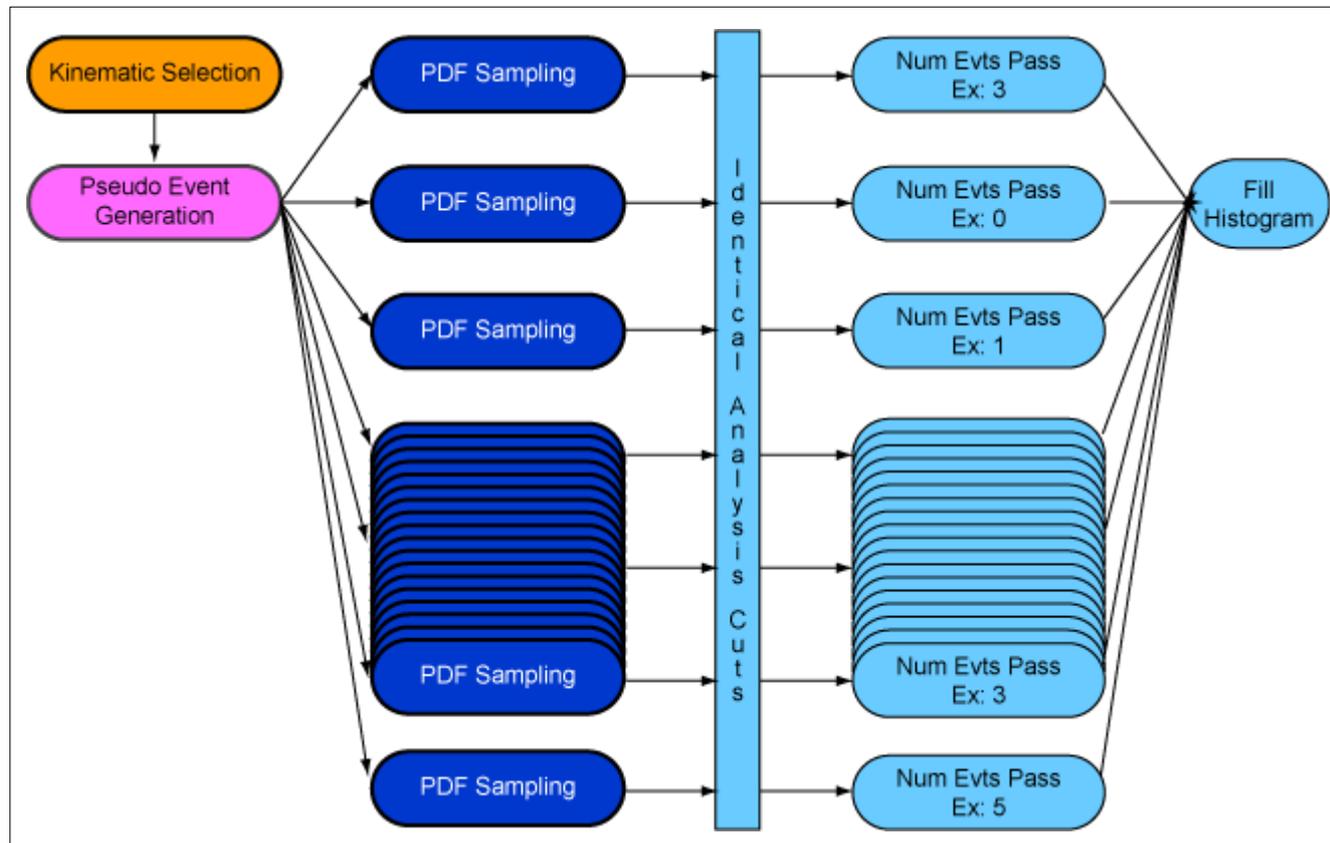

The orange and magenta boxes represent the steps selecting an event, and generating a psuedoevent. Now we sample from the PDFs many times (navy). The resulting events are passed through analysis cuts.

The results of these cuts are stored for each “pseudo-experiment,” and the resulting number of background events are filled in a single histogram.

2010-12-03

